



FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (MM)	ITEM CODE	QTY
1	PIPE (GREP) 7.0MM WT API 15LR	200	MC000007306-(1G03)	25.2M
2	PIPE (GREP) 4.1MM WT API 15LR	80	MC000007258-(1G03)	0.3M
3	TEE EQUAL (GREP)	200 x 200	MC000006172-(1G03)	3
4	GLASS REINFORCED PLASTIC (GRP) SADDLE REDUCING SW (GREP)	200 x 80	MC000005857-(1G03)	2
5	GLASS REINFORCED PLASTIC (GRP) SADDLE REDUCING SW (GREP)	200 x 50	MC000005838-(1G03)	2
6	GLASS REINFORCED PLASTIC (GRP) FLANGE SW 150LB FF HUBLESS	200	MC000006183-(1G03)	5
7	GLASS REINFORCED PLASTIC (GRP) FLANGE SW 150LB FF HUBLESS	80	MC000006127-(1G03)	2
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (MM)	ITEM CODE	QTY
8	FLANGE BLIND 150LB RF ST.STL. ASTM A182 F316L	80	MC000002230-(1G03)	2
9	GASKET 150LB FF 3.2MM (COMPR)	200	MC000006175-(1G03)	3
10	COMP CARBON FIBRE / NBR BINDER GASKET 150LB FF 3.2MM (COMPR)	80	MC000005292-(1G03)	2
11	200 MM LG STUD BOLT C/W 2 NUTS ASTM A193-B8M CL2 & A194-8M	19	PC000000832-(1G03)	24
12	125 MM LG STUD BOLT C/W 2 NUTS ASTM A193-B8M CL2 & A194-8M	16	PC000000357-(1G03)	8

CUT PIPE LENGTH						
PIECE NO	CUT LENGTH	N.S. (MM)	REMARKS	PIECE NO	CUT LENGTH	N.S. (MM)
<1>	150	80		<2>	6000	200
<3>	2160	200		<4>	4998	200
<5>	147	80		<6>	4015	200
<7>	3994	200		<8>	3990	200

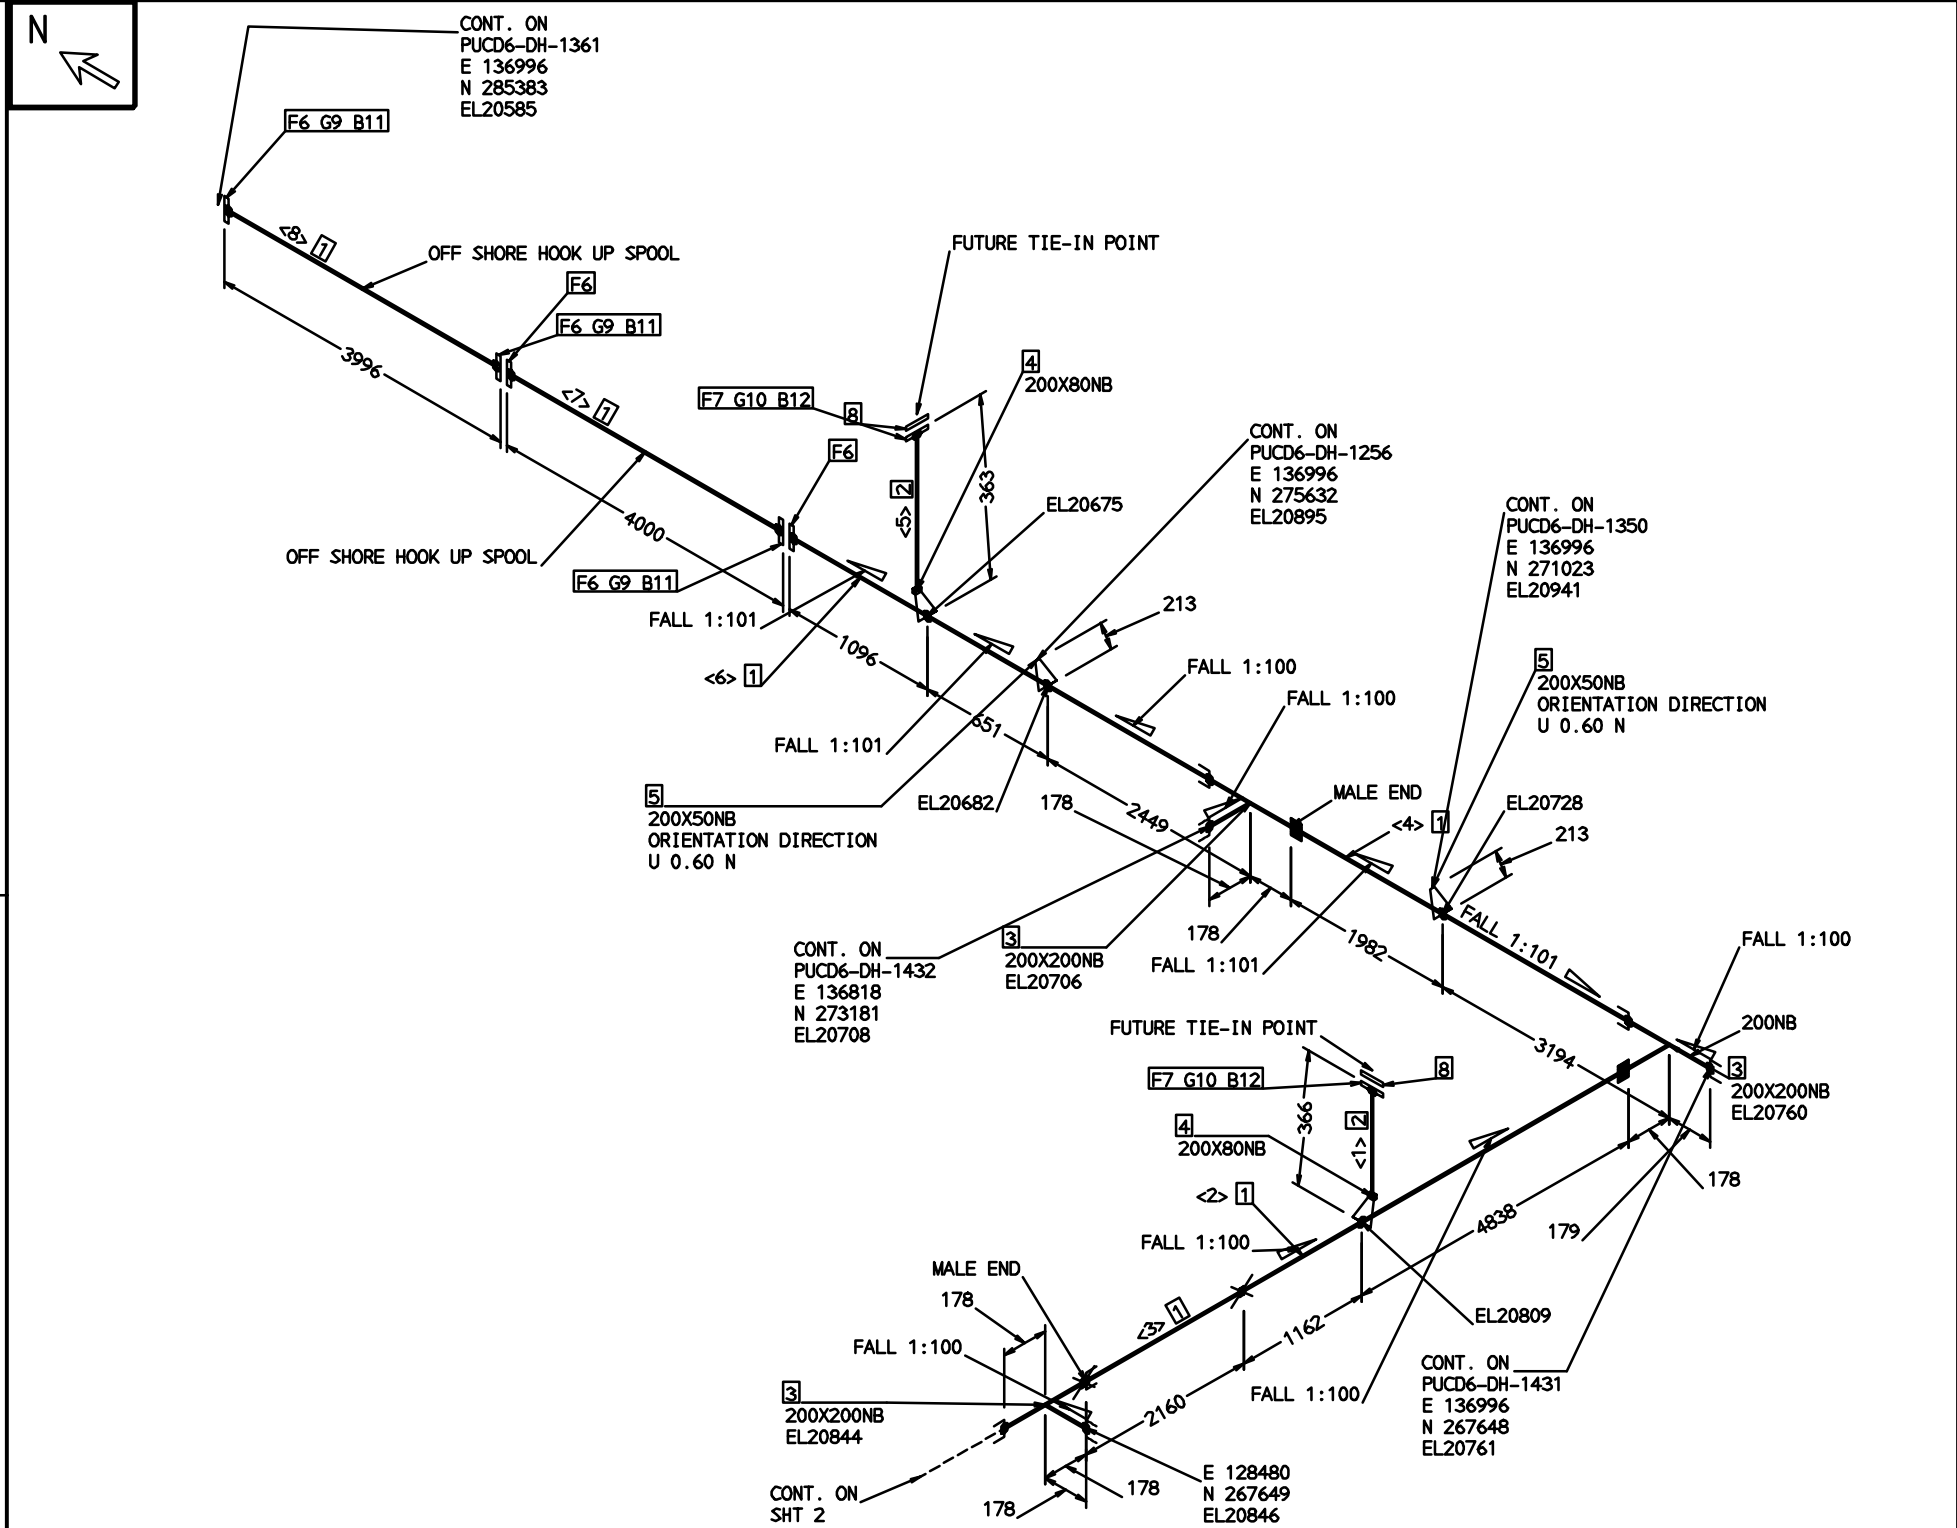

GRP

HOLDS 1 BRANCH LOCATION		Notes 1. NO MODIFICATIONS TO CRITICAL LINES WITHOUT PRIOR APPROVAL FROM STRESS DEPARTMENT.		MATL CODE	COMM. PACK	TEST LOOP NO.	PRIORITY
Reference Drawings FOR ISOMETRIC LEGEND SHEET SEE DRAWING :- WNB-3000-DX-1000.01							6
TEST PRESSURE KPa g	1800	LAST ITEM NUMBER					
TEST MEDIUM	POT. WATER						
INSULATION THICKNESS	NONE						
COLOUR CODE	BLACK.W.Y.11	LAST WELD NUMBER	C1				
PAINT SYSTEM	-						
N.D.T. CLASS	2			REV	DATE	REVISIONS	BY
				22797			
				ISO DATA : bbrzz05 30-DEC-96			
				G.A. REFERENCE : 2604.01			
				P&ID REFERENCE : 3090.02			
				DESTINATION CODE : A			
				AREA : CD6			
				STRESS RELIEF : N			
				CRITICAL LINE : Y			
				INSULATION CLASS :			
				SPECIFICATION : 1G3			
				DRAWING NUMBER			
				WNB-PUCD6-DH-1360.01			
				SHT 1 OF 2			